

LWA Liquid Cooled Gensets

50Hz; 1500r/min	5.8 - 22.0 kVA
3000r/min	9.7 - 39.2 kVA
60Hz; 1800r/min	7.1 - 28.6 kVA
3600r/min	10.6 - 31.3 kVA

LWA10(A), LWA14(A), LWA15(A), LWA20(A), LWA22(A), LWA27(A), LWA30(A), LWA41(A) | Meccalte alternator

Open Genset



Acoustic Genset



Note:

These gensets do not comply with Harmonised International Regulated Emissions Limits. LWA gensets do not comply with noise directive 2000/14/EC.

SPECIAL ATTRIBUTES

- 500-hour service intervals
- designed for continuous operation in ambient temperatures up to 52°C (122°F)
- cold start capability down to -32°C (-25.6°F)

STANDARD FEATURES

- control system with electronic digital control module
- single bearing, 4-pole brushless alternator [LWA10(A), LWA15(A), LWA20(A), LWA27(A)], 2-pole brushless alternator [LWA14(A), LWA22(A), LWA30(A), LWA41(A)]
- 66-litre polypropylene fuel tank with contents gauge
- zirconium phosphated powder coated base plate with forklift pockets
- bunded base retaining 110% of all fluids
- anti vibration mountings
- 12V starter battery and leads
- mechanical governing
- emergency stop button (lock-down type)
- pusher fan
- operators' handbook
- electrical diagrams

BASIC CHARACTERISTICS

- 50 Hz, 1500 r/min and 3000 r/min or 60 Hz, 1800 r/min and 3600 r/min
- diesel fuelled and approved for operation on biodiesel, that conforms with ASTM D6751 and EN14214, concentrations of up to 20%
- naturally aspirated or turbocharged 4 cylinder
- open set (LWA) or acoustic set [LWA(A)]


OPTIONAL ITEMS

A comprehensive range of options allows you to select a specification that matches your requirements. Please ask your Lister Petter Power Systems distributor.

ACOUSTIC SET OPTIONS



Sand filter unit



Industrial electrical output sockets




Rodent mesh



Large service doors showing fold-down front panel on cubicle and external emergency stop button *



Roof mounted lifting eye bolt fixings *



Internal dummy load unit (various rating)

* These are standard features on canopied gensets

OPEN SETS ONLY

- engine mounted exhaust silencer (not illustrated)

ACOUSTIC SETS ONLY

- acoustic canopy
- residential exhaust silencer
- 2 off roof mounted lifting eye bolt fixings
- external emergency stop button
- tough ripple effect paint finish
- earth straps on service doors
- large side door for easy service access
- document pocket in access door

ALTERNATOR SPECIFICATION

- single bearing, 2-pole or 4-pole brushless alternator
- solid state AVR with $\pm 1.5\%$ voltage regulation as standard
- class H insulation on the rotor and stator
- IP23 protection class

CONTROL CUBICLE

All LWA(A) sets have a vibration-isolated control cubicle, which has the following features:

- electronic digital control module with monitoring/control facility and warning indicators
- automatic shutdown protection
- emergency stop button (lock-down type) – open sets only
- AC output circuit breaker with over-current protection
- DC circuit control switch and overload circuit breaker

The control module gives digital readouts of:

- generator voltage (phase-to-phase and phase-to-neutral)
- generator current (each phase displayed separately)
- generator output frequency
- mains voltage (phase-to-phase and phase-to-neutral) AMF sets only
- mains frequency (each phase displayed separately) AMF sets only
- engine speed
- engine coolant temperature
- battery voltage
- engine hours run

The control module has indicators for:

- over speed / under speed
- emergency stop
- failure to start
- battery charger failure

Automatic shutdown occurs under:

- low engine oil pressure
- high engine temperature
- over speed / under speed
- failure to start after three attempts

MANUAL / REMOTE START SETS

These sets have the flexibility of either manual or remote automatic operation:

- manual operation is by START and STOP push-buttons on the control module
- remote operation is achieved by connecting a 2-wire circuit to the relevant terminals on the control module and is activated by setting the control module to AUTO

AUTOMATIC MAINS FAILURE SETS (AMF)

AMF control system integral with control cubicle

The AMF specification provides that in the event of a mains failure the generating set will automatically operate to supply the electrical load. In addition to the standard features automatic mains failure sets have the following features:

- mains monitoring unit to control set operation
- load-transfer contactors, mechanically and electrically interlocked (rated for set output)
- indicator for mains-on-load or plant-on-load
- control module timer circuits set to delay start, delay transfer back to mains and delay stop to allow for engine cool down
- solid state automatic battery charger that maintains charge when set is not running

OPTIONAL ITEMS

- integral residential exhaust silencer as fitted to acoustic gensets (open sets only)
- remote residential exhaust silencer for plant room installations (open sets only)
- acoustic canopy kit (including residential silencer kit) for retrofitting to open sets
- AMF system with remote mounted ATS panel
- sand filter unit, high efficiency, labyrinth type complete with washable dust element (acoustic sets only)
- rodent mesh
- integral dummy loads (various ratings)
- industrial electrical output sockets
- automatic solid-state 4-Amp battery charger (standard on AMF gensets)

POWER OUTPUTS ³ | UNREGULATED EMISSIONS RATINGS

			50Hz				60Hz			
Model	Engine	Rating	1500 r/min				1800 r/min			
			Single phase		Three Phase		Single phase		Three Phase	
			220V*	230V*	380/220V*	400/230V*	220 or 110V*	230 or 115V*	220/127V*	230/133V*
			240V*		415/240V*		240 or 120V*			
			kVA	kW	kVA	kW	kVA	kW	kVA	kW
LWA10	LPW2	COP ³	5.8	5.8	7.7	6.2	7.1	7.1	9.4	7.5
		PRP ¹	6.1	6.1	8.1	6.5	7.4	7.4	9.9	7.9
		ESP ²	6.3	6.3	8.5	6.8	7.8	7.8	10.3	8.2
LWA15	LPW3	COP ³	8.9	8.9	11.9	9.5	10.9	10.9	14.6	11.7
		PRP ¹	9.3	9.3	12.5	10.0	11.4	11.4	15.3	12.2
		ESP ²	9.8	9.8	13.0	10.4	12.0	12.0	16.0	12.8
LWA20	LPW4	COP ³	11.9	11.9	16.0	12.8	14.9	14.9	20.0	16.0
		PRP ¹	12.5	12.5	16.8	13.4	15.7	15.7	21.0	16.8
		ESP ²	13.1	13.1	17.6	14.1	16.4	16.4	22.0	17.6
LWA27	LPWT4	COP ³	15.2	15.2	20.0	16.0	19.4	19.4	26.0	20.8
		PRP ¹	16.0	16.0	21.0	16.8	20.3	20.3	27.3	21.8
		ESP ²	16.8	16.8	22.0	17.6	21.3	21.3	28.6	22.9
Model	Engine	Rating	3000 r/min				3600 r/min			
			Single phase		Three Phase		Single phase		Three Phase	
			220V*	230V*	380/220V*	400/230V*	220 or 110V*	230 or 115V*	220/127V*	230/133V*
			240V*		415/240V*		240 or 120V*			
			kVA	kW	kVA	kW	kVA	kW	kVA	kW
LWA14	LPW2	COP ³	9.7	9.7	13.0	10.4				
		PRP ¹	10.2	10.2	13.6	10.9				
		ESP ²	10.7	10.7	14.3	11.4	10.6	10.6	14.1	11.3
LWA22	LPW3	COP ³	15.3	15.3	20.1	16.1				
		PRP ¹	16.1	16.1	21.1	16.9				
		ESP ²	16.8	16.8	22.1	17.7	16.9	16.9	22.4	17.9
LWA30	LPW4	COP ³	21.0	21.0	27.9	22.3				
		PRP ¹	22.0	22.0	29.3	23.4				
		ESP ²	23.0	23.0	30.7	24.5	23.7	23.7	31.3	25.0
LWA41	LPWT4	COP ³	25.5	25.5	35.7	28.5				
		PRP ¹	26.8	26.8	37.4	29.9				
		ESP ²	28.0	28.0	39.2	31.3				

Notes:

3. Power outputs are based on Meccalte alternators. Power Factor (pf). Single phase 1.0 pf; three phase 0.8 pf.

* Other voltages are available on request

RATING DEFINITIONS TO ISO 8528-1

Standard Reference Conditions

A Lister Petter generating set is designed to operate in the following ISO 3046 environmental reference conditions.

Barometric pressure 100 kPa

Relative humidity 30%

Ambient air temperature at the inlet manifold 25°C

1. Prime Power (PRP)

This rating is for the supply of the maximum power which a generating set is capable of delivering continuously whilst supplying a variable electrical load when operated for an unlimited number of hours per year.

The permissible average power output over 24 hours of operation shall not exceed 70 % of the PRP unless otherwise agreed by Lister Petter Power Systems Limited.

2. Emergency Standby Power (ESP)

Emergency standby power is defined as the maximum power available during a variable electrical power sequence, for which a generating set is capable of delivering in the event of a utility power outage or under test conditions for up to 200 hours of operation per year.

The permissible average power output over 24 hours of operation shall not exceed 70% of the ESP unless otherwise agreed by Lister Petter Power Systems Limited. The actual average power output shall be below or equal to the permissible average power output as defined for ESP. The above ratings are subject to the following ISO 3046 standard operating conditions, the use of fuel to BS EN 590 Class A1 or A2, lubricating oils of the correct performance specification and viscosity classification and that the maintenance intervals and procedures are carried out as prescribed by Lister Petter Power Systems Limited.

3. Continuous Power (COP)

This rating is for the supply of a constant load for an unlimited number of hours annually.

Derating

For non-standard site conditions, reference should be made to relevant BS, ISO & DIN standards.

APPROXIMATE FUEL CONSUMPTION

			50 Hz		60 Hz		50 Hz		60 Hz	
Genset	Engine	Load	1500 r/min		1800 r/min		3000 r/min		3600 r/min	
			g/kWh	l/h	g/kWh	l/h	g/kWh	l/h	g/kWh	l/h
LWA10	LPW2	100%	224	2.0	247	2.5				
		75%	224	1.5	250	1.9				
LWA15	LPW3	100%	261	3.2	243	3.7				
		75%	261	2.4	245	2.8				
LWA20	LPW4	100%	253	4.1	237	4.8				
		75%	255	3.1	237	3.6				
LWA27	LPWT4	100%	209	4.7	212	6.1				
		75%	207	3.5	213	4.6				
LWA14	LPW2	100%					244	3.9	311	4.7
		75%					342	2.9	309	3.5
LWA22	LPW3	100%					247	5.9	330	7.5
		75%					245	4.4	328	5.6
LWA30	LPW4	100%					244	7.8	327	9.9
		75%					247	5.9	326	7.4
LWA41	LPWT4	100%					364	10.6		
		75%					266	8.0		


SOUND PRESSURE ⁴

LWA (acoustic sets), 75% load at 7m

Genset model	50 Hz	60 Hz	50 Hz	60 Hz
	1500 r/min	1800 r/min	3000 r/min	3600 r/min
LWA10 (A)	64 dBA	65 dBA		
LWA15 (A)	64 dBA	65 dBA		
LWA20 (A)	64 dBA	66 dBA		
LWA27 (A)	62 dBA	63 dBA		
LWA14 (A)			75 dBA	77 dBA
LWA22 (A)			75 dBA	77 dBA
LWA30 (A)			75 dBA	77 dBA
LWA41 (A)			73 dBA	

APPROXIMATE DIMENSIONS AND WEIGHT

		Open sets			
		LWA10	LWA15	LWA20	LWA27
Dry weight	kg	375	395	434	444
	lb	825	871	957	979
Length (A)	mm	1436			
	in	56.5			
Width (B)	mm	698			
	in	27.5			
Height (C)	mm	992			
	in	39.0			
		Open sets			
		LWA14	LWA22	LWA30	LWA41 (50Hz only)
Dry weight	kg	375	395	434	444
	lb	825	871	957	979
Length (A)	mm	1436			
	in	56.5			
Width (B)	mm	698			
	in	27.5			
Height (C)	mm	1010			1086
	in	39.8			42.8
		Acoustic sets			
		LWA10A (SF*)	LWA15A (SF*)	LWA20A (SF*)	LWA27A
Dry weight	kg	463 (476)	494 (504)	559 (569)	569
	lb	1019 (1041)	1087 (1109)	1230 (1252)	1252
Length (A)	mm	1675 (1775)			
	in	65.9 (69.9)			
Width (B)	mm	705			
	in	27.8			
Height (C)	mm	1100			
	in	43.3			
		Acoustic sets			
		LWA14A (SF*)	LWA22A (SF*)	LWA30A (SF*)	LWA41 (50Hz only)
Dry weight	kg	463 (476)	494 (504)	559 (569)	569
	lb	1019 (1041)	1087 (1109)	1230 (1252)	1252
Length (A)	mm	1675 (1775)			
	in	65.9 (69.9)			
Width (B)	mm	705			
	in	27.8			
Height (C)	mm	1118			1218
	in	44.7			47.9

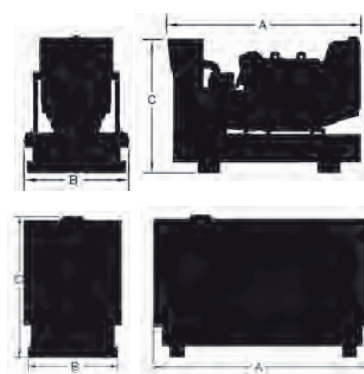

*Length with sand filter fitted



Head Office

Lister Petter Power Systems Limited
Broadmeadow Industrial Estate
Teignmouth, TQ14 9AE
T: +44 (0) 1285 702211

Production Facility

Lister Petter Power Systems Limited
Units 13-15 Quadrant Distribution Centre
Hardwicke, Gloucester, GL2 2RN

sales@listerpetter.com
www.listerpetter.com

Distributor Address

 **MADE IN BRITAIN**